



Rec'd PCT/PTO

09 MAY 2005


P GB 2003 / 0 0 5 3 1 7

10/534356



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

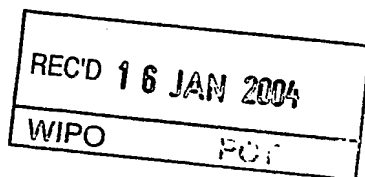


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

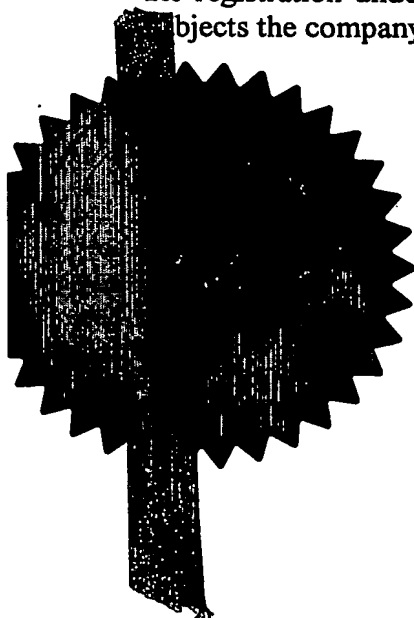



Signed

Dated 5 January 2004 -

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY



Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

581GB

2. Patent application number

(The Patent Office will fill in this part)

0228368.7

E5 DEC 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Renishaw plc
New Mills
Wotton-under-Edge
Gloucestershire, GL12 8JR

Patents ADP number (If you know it)

2691002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Probe For High Speed Scanning

5. Name of your agent (If you have one)

E C Leland et al

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Renishaw plc, Patent Department
New Mills
Wotton-under-Edge
Gloucestershire, GL12 8JR

Patents ADP number (If you know it)

21874291001

E

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (If you know it) the or each application number

Country

Priority application number
(If you know it)

Date of filing
(day / month / year)

-

-

-

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

-

-

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 13

Claim(s) 0

Abstract 0

Drawing(s) 5

TS

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 0

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

K. Kelan

Date 04.12.2002

AGENT FOR THE APPLICANT

12. Name and daytime telephone number of person to contact in the United Kingdom

A ILES 01453 524524

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459-500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

PROBE FOR HIGH SPEED SCANNING

This invention relates to a scanning probe for use on a coordinate positioning machine such as a coordinate measuring machine, machine tool, manual coordinate measuring arm or inspection robot, to measure the position or contour of a surface.

One known type of coordinate positioning machines includes for example an arm supported for movement in mutually perpendicular directions relative to a table on which a workpiece is supportable, and transducers for measuring the position of the arm relative to a reference position or datum on the table. A scanning probe typically comprises a relatively fixed structure such as a housing, a stylus supported on a support assembly for 3-dimensional movement relative to the fixed structure, and transducers for measuring the position of the stylus relative to a reference position on the fixed structure.

In use the fixed structure of the probe is secured to the arm of the machine and, in a typical operation, the stylus engages a point on the workpiece where, as a result, it is displaced relative to the fixed structure. The sum of the outputs of the respective transducers in the probe and coordinate positioning machine defines the position of the stylus relative to the datum.

A conventional type of scanning probe consists of a parallel spring mechanism which allows the stylus to translate, a deflection measurement system to measure the stylus translation, and damping means to minimise

free space inertia deflection of the probe mechanism and stylus.

It is known from U.S. Patent No. 5390424 to provide an
5 analogue probe having a stylus supported relative to a
fixed structure by three serially connected parallel
springs. Displacement of the stylus relative to the
fixed structure is transduced by optical means,
comprising three optical scales provided on a member to
10 which the stylus is connected and corresponding
readheads located on the fixed structure adjacent the
optical scales. The member moves relative to the fixed
structure with movements which correspond to the
movements of the sensing tip of the stylus.

15

This is an example of a passive probe, in which during
measurement the springs in the suspended probe
mechanism generate a force to match the deflection.
This contact force varies with deflection but is highly
20 repeatable.

U.S. Patent No. 3,876,799 discloses a probe with a
stylus supported by a series of spring parallelograms
and in which motors are provided to generate a
25 predetermined force between the stylus tip and the
workpiece to be measured.

This probe is a type of active scanning probe which
~~uses a motorised mechanism to control stylus deflection~~
30 and modulate the contact force with the component to be
measured. In such a probe, motors, rather than
springs, generate the contact force.

describes a probe which includes a hollow stylus wherein an optical transducer system is provided within the stylus assembly. A light source directs a light beam towards a retroreflector in the stylus tip which
5 is reflected towards a detector, such that lateral displacement of the stylus tip can be measured.

It is desired to inspect workpieces at a fast speed using high speed scanning. However high speed scanning
10 results in a significant increase in the vibration of the total system.

In addition, at high speed the stylus tip may no longer follow the surface contours of the workpiece and
15 instead just remain in contact with the surface at the peaks of the contours, whilst losing contact with the surface at the troughs. It is desirable for the probe to have sufficient mechanical response to follow the surface contours of the workpiece at high speed. The
20 mechanical response is the ability of the probe mechanism (for example the springs) to track the surface.

If the mechanical response of the scanning probe is
25 low; for example less than 20Hz, the probe will not be able to react to the vibrations and contour modulations described above and a mismatch or error can occur between the combined coordinate measuring machine and scanning probe data and the actual surface profile.

30

It is also common for the probe to have mechanical or electrical vibration damping to damp any unwanted transient vibrations or inertia during movement of the probe and machine arm. However, during fast scanning,

this damping has the unwanted effect of masking some surface induced stylus bending and thus causing a measuring error.

- 5 To ensure adequate data matching with the surface, a transducer having a high mechanical response bandwidth for measuring either stylus deflection or force is required. However a transducer with a high mechanical response bandwidth and high natural frequency will have
10 a limited working range. For example, a transducer with a frequency response of over 50Hz may have a working range of less than 500 μ m.

The present invention provides a probe for use on a
15 coordinate positioning apparatus comprising:

a housing attachable to an arm of the coordinate positioning apparatus and a stylus mounted on a stylus support member, said stylus and stylus support member being deflectable with respect to the housing;

- 20 a first transducer system which measures transverse movement of the stylus support member relative to the arm of the coordinate positioning
apparatus;

- a second transducer system which measures movement
25 of the tip of the stylus relative to the stylus supporting member;

such that a measurement of total stylus deflection is achieved by combining the data from the first and
~~second transducer systems.~~

30

Preferably the second transducer system has a higher mechanical response than the first transducer system.

Preferably the second transducer system has a

mechanical response exceeding 100Hz.

The combination of the data from the first and second transducers enables the probe to scan a surface at high speed whilst remaining in full contact with the surface contours and retaining an acceptable working range.

The second transducer system may comprise for example strain gauges, capacitance sensing or optical sensing.

Preferably the second transducer system is located near the tip of the stylus.

According to a second aspect, the invention provides a method of measuring a surface of an object with a probe, said probe comprising a housing and a stylus mounted on a stylus support member, said stylus and stylus support member being deflectable with respect to the housing; the method comprising the steps of:

mounting the probe on an arm of a coordinate positioning apparatus;

positioning the probe so that the stylus is in contact with the surface to be measured and moving the probe along said surface with the stylus remaining in contact with said surface;

obtaining data from a first transducer system which measures transverse movement of the stylus supporting member relative to the arm of the coordinate positioning apparatus;

obtaining data from a second transducer system which measures movement of the tip of the stylus relative to the stylus supporting member;

and combining the data from the first and second transducer systems to produce a measurement of total

probe deflection.

Embodiments of the invention will now be described by way of example, and with reference to the accompanying drawing wherein:

Fig 1 illustrates an analogue probe mounted on a coordinate measuring machine;

Fig 2 is a cross section of the probe of a first embodiment of the invention;

Fig 3 is a cross-section of the stylus changer module shown in Fig 2;

Fig 4 is a side view of a stylus changer module for the probe according to a second embodiment of the invention;

Fig 5 is a cross-section of the stylus shown in Fig 4; and

Fig 6 is a side view of a stylus changer module for the probe according to a third embodiment of the invention.

A coordinate measuring machine (CMM) 2 is shown in Fig 1 and comprises a machine table 4 on which a workpiece 8 may be placed. An analogue probe 5 having a deflectable stylus 9 and workpiece-contacting tip 12 is mounted on a quill 6 of the machine 4. The quill 6 and probe 5 may move in X,Y and Z directions under the action of the CMM X,Y and Z drives controlled by a computer. X,Y and Z scales of the CMM show the instantaneous-coordinates-of-the-position-of-the-quill

on which the probe is mounted in three dimensions. Signals from the probe indicating the deflection of the probe stylus are combined with the readings from the X,Y and Z scales of the CMM to calculate the position of the stylus tip and thus the surface of the

workpiece.

The computer contains a programme which causes the probe to scan the surface of the workpiece.

5

The probe will now be described in more detail with reference to Fig 2. The probe 5 has a fixed structure 16 and a stylus supporting member 28 suspended relative to the fixed structure 16 by three serially connected
10 pairs of leaf springs 18,20,22. The pairs of leaf springs permit translations of the stylus supporting member 28 relative to the fixed structure 16 in the X,Z and Y directions respectively, thus providing three translational degrees of freedom. The pairs of leaf
15 springs 18,20,22 however act, to a first approximation, to prevent rotation of the stylus supporting member 28 relative to the fixed structure 16. The stylus supporting member 28 supports an elongate stylus 10 having a substantially spherical workpiece sensing tip
20 12 at its free end.

The stylus 10 is connected to a stylus changer module 50 which is in turn releasably mounted on the stylus mounting member 28 of the probe by magnetic means. The
25 position of the stylus changer module 50 is defined by a co-operating kinematic elements 52,54 on the stylus changer module 50 and stylus mounting member 28 in known fashion.

30 The stylus supporting member 28 is connected to a member 14 which in turn is connected to the probe housing 16 via three pairs of leaf springs 18,20,22. The three pairs of leaf springs 18,20,22 are interconnected in series and are arranged to flex in the X,Y

and Z dimensions respectively. The three pairs of leaf springs 18,20,22 are positioned in the YZ, XZ and XY planes respectively.

- 5 Each spring may be regarded as having a free and a fixed end, the fixed end being the end which, in the in-series connection, is nearest the housing 16.

In this manner, springs 18 have free and fixed ends
 10 18A,18B secured to the member 14 and an intermediate member 24 respectively. Springs 20 have free and fixed ends 20A,20B secured respectively to the intermediate member 24 and a second intermediate member 26. The
 15 springs 22 have free and fixed ends 22A and 22B secured respectively to the second intermediate member 26 and a part 16A of the housing 16.

A compact space-saving arrangement of the springs 18,20,22, is achieved by grouping the springs as if
 20 they are lying in the six sides of a rectangular box. More specifically, the arrangement is such that the springs 20 extend from their free ends 20A toward the
free ends 18A of the springs 18 and lie adjacent the
latter ends, and the springs 18,20 are situated in the
 25 space between the springs 22.

To make possible the connection between the springs 20,22 to the second intermediate member 26, the latter
~~has a part 26A connecting the fixed ends of the springs~~
 30 20 and a perpendicular part 26B connecting the free ends of the springs 22, the fixed ends of the latter spring being connected by the part 16A.

As shown, the member 14 to which the stylus is secured

is innermost to the box formed by the springs 18,20,22. Hence the member 26A and the adjacent spring 22 have holes 30,32 for the stylus supporting member 28 to extend to the exterior of the said box.

5

As shown in Fig 2, the stylus supporting member 28 is connected to an elongate stem 34 which extends through apertures in the leaf springs. The distal end of the stem 34 supports a cube 36 on which three scales
10 40,42,44 are mounted. Two of the scales 40,42 have lines extending in the Z direction and are mounted in XZ and YZ planes respectively and the third scale 44 has lines extending in the X direction and is mounted on the cube in an XZ plane. The cube 36 moves within
15 cavity provided in the fixed structure, with movements which correspond exactly to the movements of the stylus supporting member 28 and to a first order approximation, the sensing tip of the stylus 12.

20 Readheads, of which only two 46,48 are shown are mounted on the fixed structure in register with the scales 40,42,44 and co-operate with the scales to measure displacement of the cube 36 within the cavity in the X,Y and Z directions. The readheads detect any
25 displacement of the scales in a direction perpendicular to the spacing of the lines of each of the scales, but are insensitive to any movement of the scale either in a direction perpendicular to the plane of the scale, or along the direction of the lines of the scale.

30

Movement of the cube 36 relative to the fixed structure corresponds to a first order approximation to the movement of the workpiece sensing tip 12 relative to the fixed structure 16.

This conventional system of parallel springs combined with scale and readhead transducer system comprises a primary transducer system which enables the probe to achieve a large working range of greater than 1mm.

- 5 The probe is damped in a known manner, for example by using damping fluid between two moving parts or an electronically controlled solenoid.

- 10 In addition to this primary transducer system, a high frequency secondary transducer system is provided between the probe head and the stylus tip.

- 15 Fig 2 shows a high frequency secondary transducer system comprising strain gauges 38 mounted on the wall of the stylus changer module 50. The wall of the stylus changer module is provided with three cut-out portions 40 such that three thin deformable bridges 42 remain. The strain gauges 38 are mounted on these deformable bridges 42.

20

Preferably three strain gauges are mounted on the stylus changer module, spaced 120° apart, as shown in

- Fig 3. This allows measurement of stylus bending in X, Y and Z. However two strain gauges may be mounted on
25 the stylus changer mount to measure stylus bending in X and Y.

- During scanning of the workpiece, bending of the stylus
~~will occur due to the measurement force exerted by the~~
30 probe. The strain gauges measure this deflection.

A second embodiment of the secondary transducer system is illustrated in Fig 4. In this figure the secondary transducers are located on the stylus 10. As before

bending of the stylus produces a signal of the strain gauges. It is preferable to place this secondary transducer as close to the stylus tip as possible.

- 5 As shown in Figs 4 and 5 the strain gauges are mounted on a deformable thin-walled tube 44 which is part of the stylus. Three strain gauges are spaced at 120° to enable measurement of the stylus bending in X,Y and Z. However if the stylus is stiff in the Z plane, it is
10 sufficient to provide two strain gauges on the stylus to just measure bending in X and Y.

- In a third embodiment shown in Fig 6, the secondary transducer system may be a combination of the first and
15 second embodiments in which the secondary transducers are provided on both the stylus changer module and the stylus. In this case the readings from these two sets of transducers are combined.

- 20 The secondary transducer system may alternatively comprise transducers such as capacitance or optical sensors.

- The total probe deflection is now the combined reading
25 of the two sets of transducers (i.e. both the primary and secondary systems). The secondary transducer system (e.g. strain gauges 38) measures movement of the stylus tip 12 relative to the stylus supporting member 28. The primary transducer system (e.g. optical scales
30 and readheads) measures movement of the stylus supporting member 28 relative to the spindle 6 of the CMM. Combination of the measurements from the primary and secondary transducers therefore provides a measurement of the movement of the stylus tip 12

relative to the CMM spindle 6.

This combination has the advantage of the large working range of the primary transducer system and the high
5 frequency of the secondary transducer system.
Although the probe head described comprises a conventional system of parallel spring combined with scale and readhead transducers, any other system may be used. For example the transducer of the primary
10 system may comprise an LVDT. Thus use of dual primary and secondary transducer systems is suitable for use in both passive and active probes.

The probe of the invention is not limited to having a
15 three degrees of freedom translational motion system, such as for example the parallel spring mechanism described above. An alternative motion system could allow translational movement about a pivot for example as described in US Patent No. 6,430,833 in which a
20 stylus holder is suspended from the probe housing by a pair of diaphragms. At least one of the diaphragms is formed with spiral cut-outs to enable the stylus to

move transversely of the axis of the housing as the stylus holder pivots when transverse forces are applied
25 to the stylus tip.

The probe of the present invention is calibrated in two stages. In a first stage the primary transducer system

~~is calibrated using known methods with a non-transduced~~
30 stylus fitted on the probe. This stylus is preferably short and rigid to minimise stylus bending during the calibration procedure.

In a second stage the non-transduced stylus is replaced

with a stylus containing the secondary transducer system and the calibration process is repeated. The secondary transducer may thus be calibrated using the data from the calibrated primary transducer and CMM
5 position data.

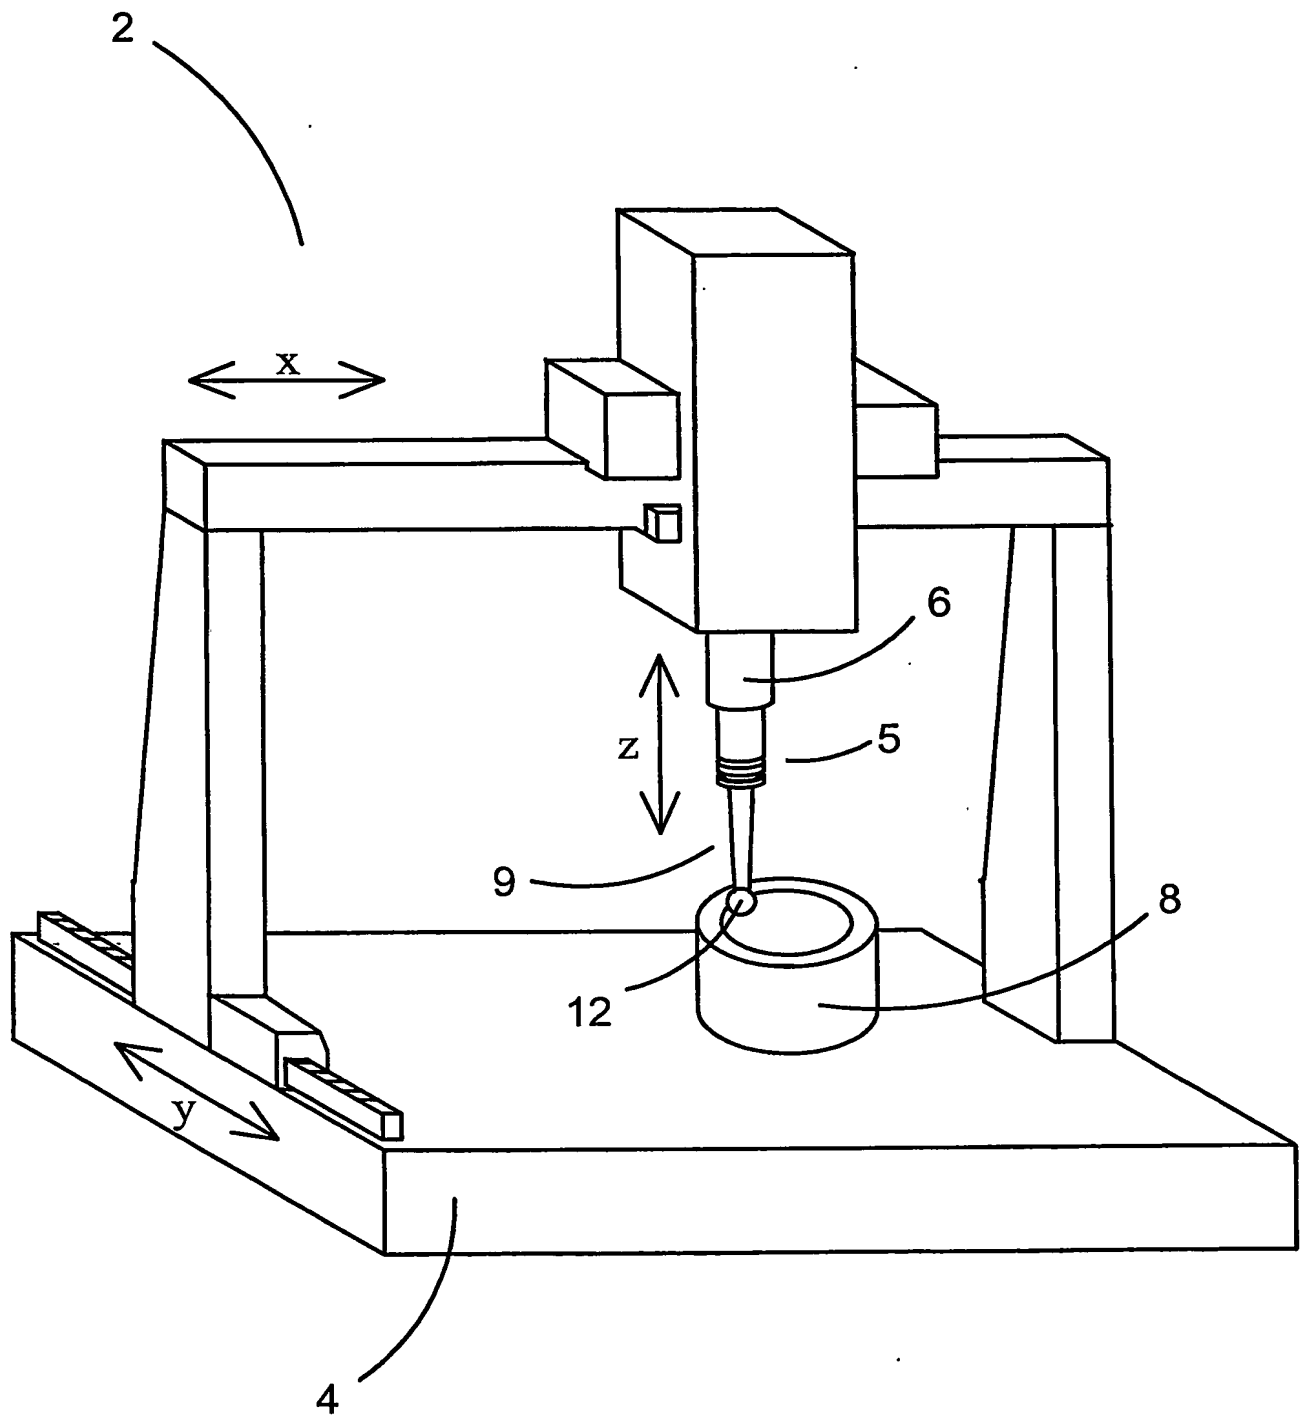


Fig 1

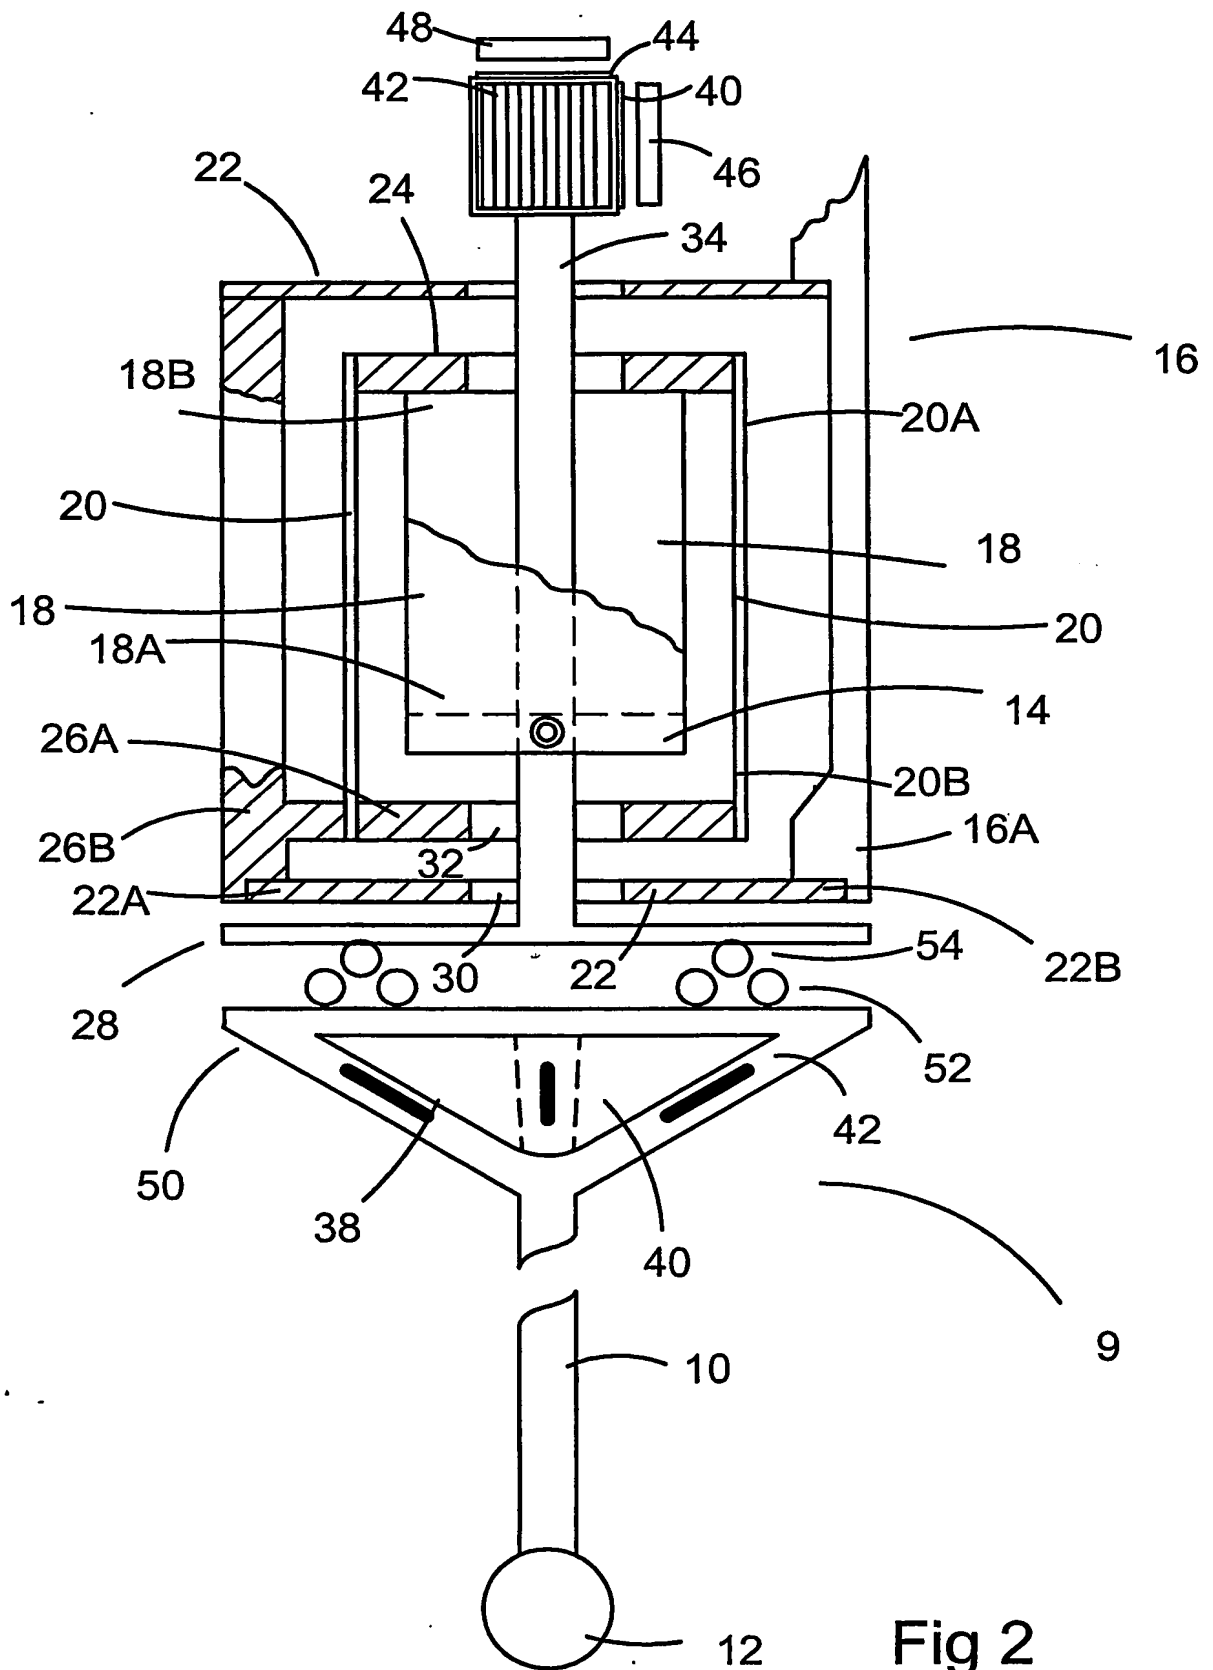


Fig 2

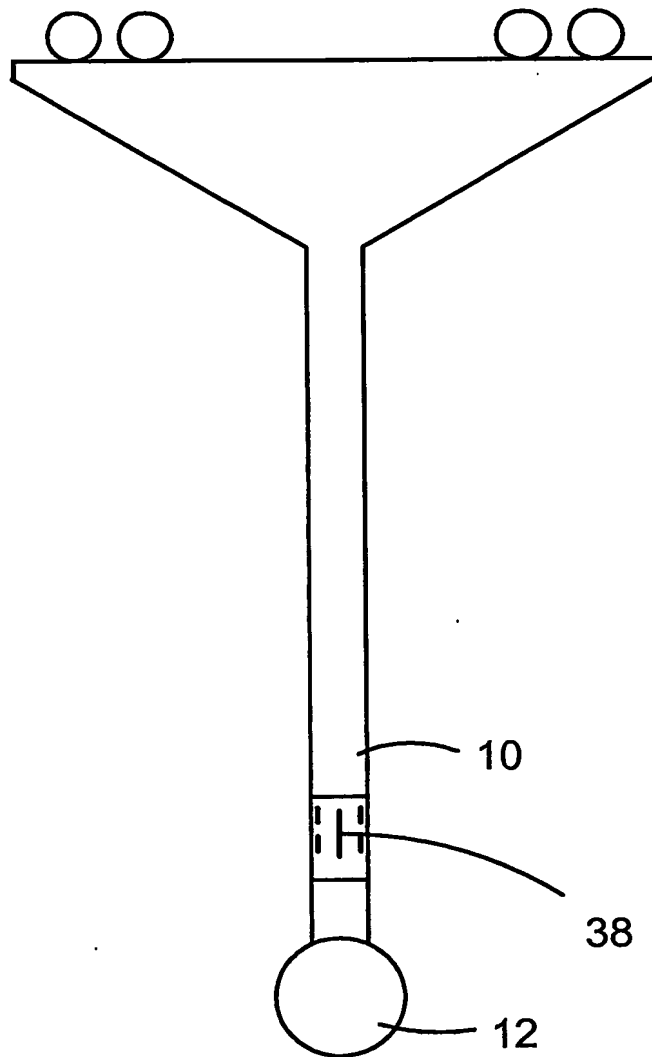


Fig 4

4/5

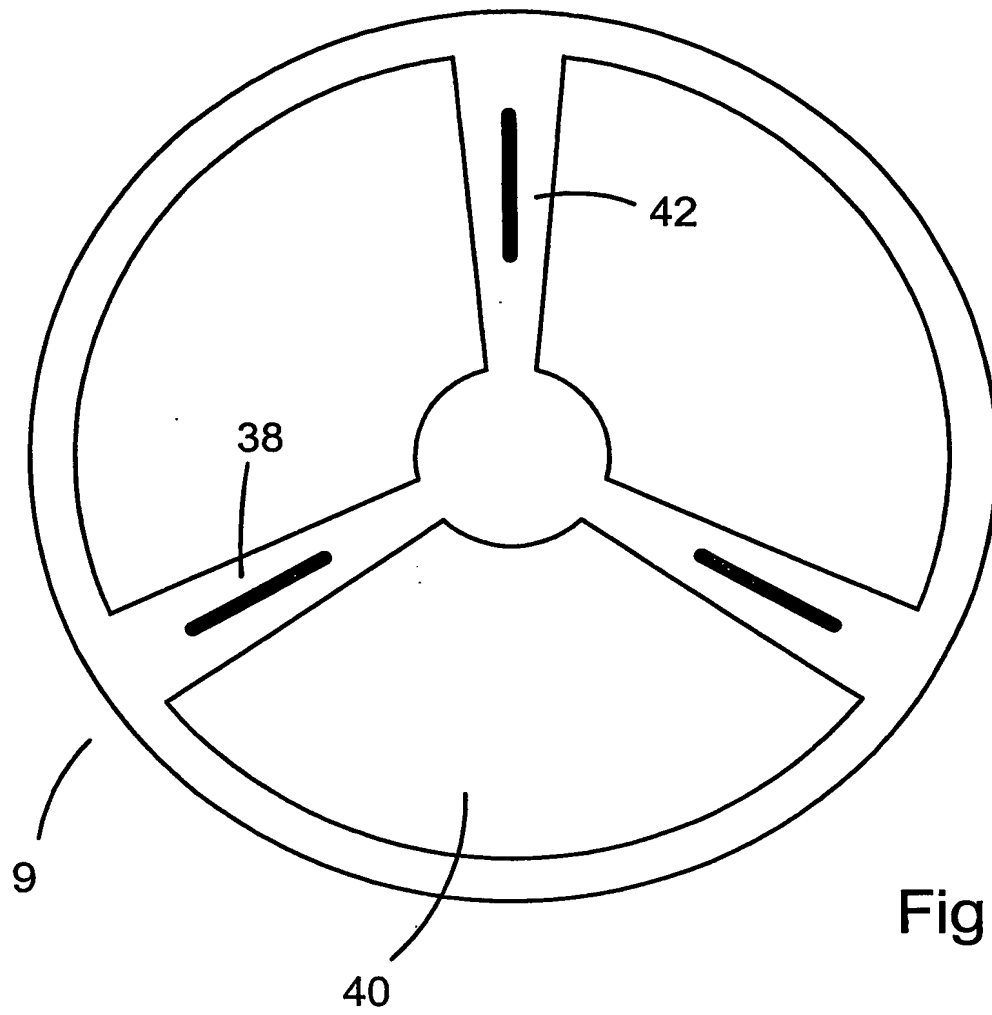


Fig 3


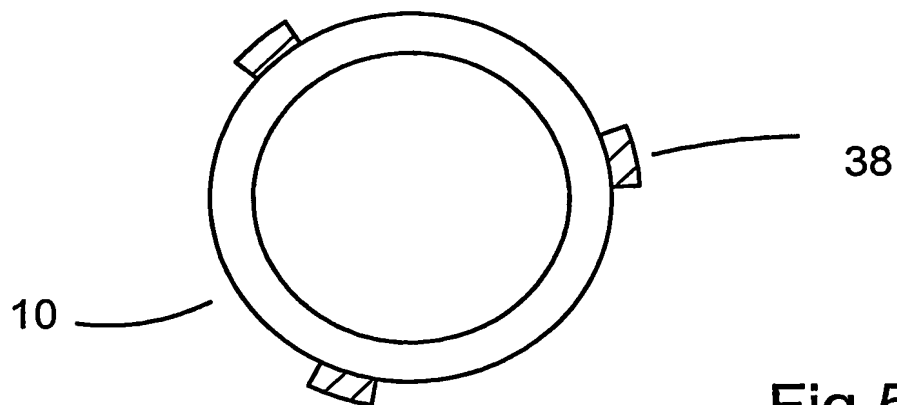


Fig 5



PCT Application
GB0305317

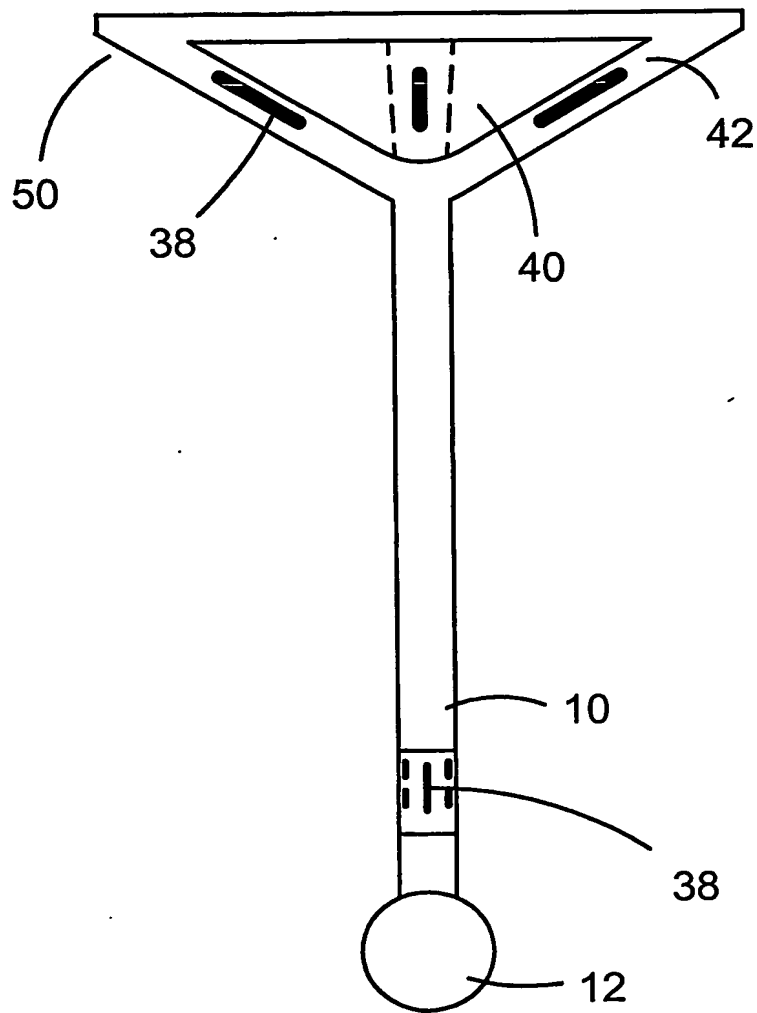

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.